

NOVUM LEAP™

PANAMA PETITE TD

PANAMA PETITE TD

Dual-purpose Chiller/Freezer

TECHNICAL SPECIFICATIONS



NOVUM
Redefining refrigeration





WWW.NOVUM.IE

TECHNICAL SPECIFICATION

		2 Door	
Panama Petite TD			
Technical Data		Frozen Mode	Chiller Mode
Gross content	litre	1754	1754
Net Content according to EN 23953	litre	1539	1539
Total Display Area (TDA) according to Eco-Directive	M²	2.2	2.2
Classification according to EN 23953		3L1	3M1
Ambient Temperature Range	°C	+16 to +25	+16 to +25
Inner Temperature Range	°C	-18 to -25	0 to +4
Sound Pressure at 1m Distance	dB(A)	46	46
Electrical Data			
Nominal Voltage / Frequency	V / Hz	220-240 / 50	220-240 / 50
Nominal Power Cabinet	w	967	967
Nominal Power LED Light	w	4 x 14	4 x 14
Nominal Current	A	4.0	4.0
Fuse Protection	A	13	13
Energy Consumption at 25°C	kWh/24h	*14.65	*7.68
Length of Power Supply Cord	mm	2000	2000
Refrigeration Data			
Refrigerant	Type	R290	R290
Gas Charge	g	2x 65	2x 65
Maximum Operating Pressure	bar	30	30
Maximum Heat Output	W/h (Btu/h)	1200	1200
Dimensions			
Length Outside/ Inside	mm	1700 / 1550	1700 / 1550
Depth Outside/ Inside	mm	800 / 573	800 / 573
Depth of shelves	mm	510	510
Number of shelves	mm	4	4
Weight			
Net Weight (excl. packaging, incl. internal accessories)	Kg	330	330
Gross Weight (incl. packaging & internal accessories)	Kg	340	340


* Estimated

Panama Petite TD Dimensions

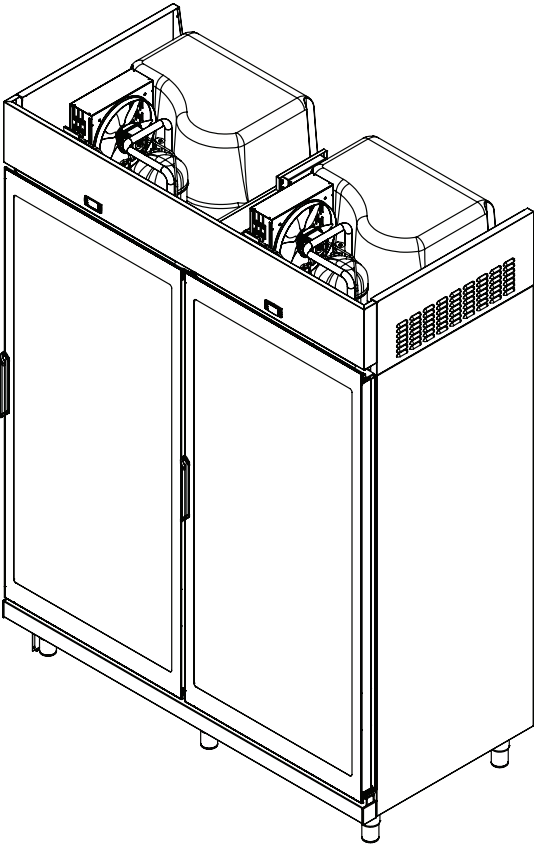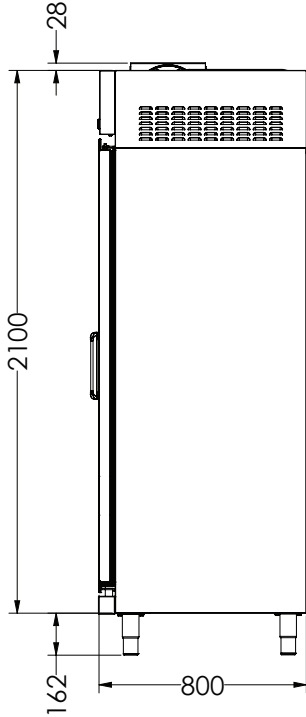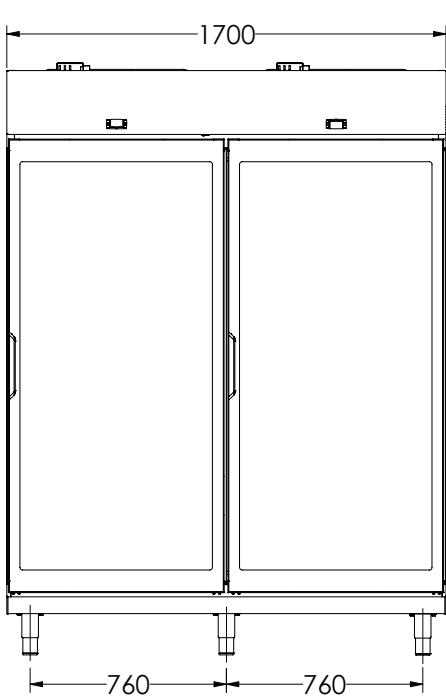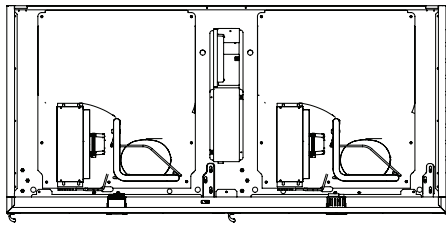

NOVUM LEAP™

PANAMA PETITE TD

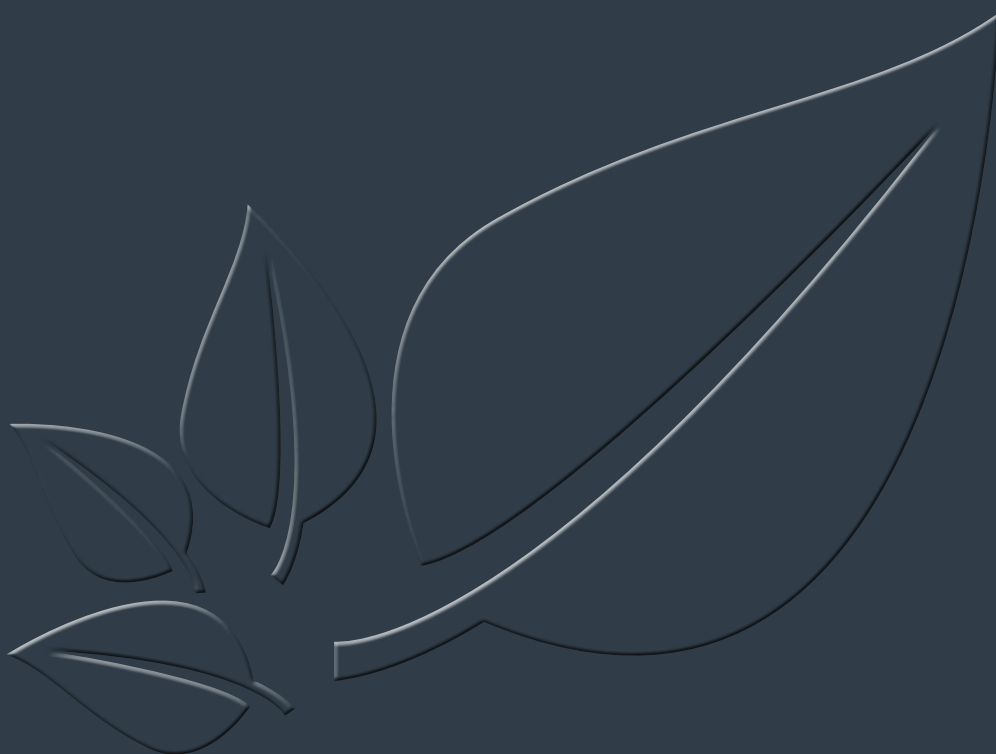

For information on patents relating to LEAP™, please visit
<https://novum.ie/supermarket/expertise-support/patents/>

NOVUM

Redefining refrigeration

Novum (Overseas) Ltd.
The Novum Building
Clonsaugh Technology & Business Park
Dublin 17, Ireland

+353 1 803 6400
www.novum.ie

January 2026