
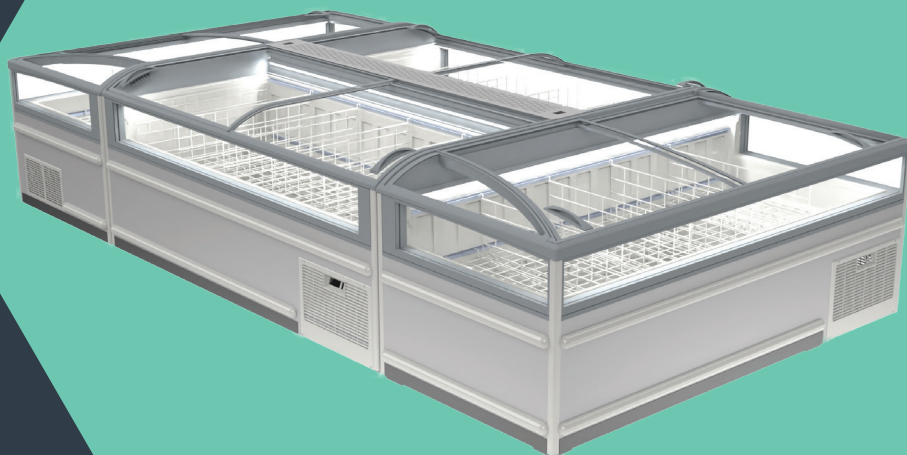


NOVUM LEAP™

GC Vista

GC Vista

TECHNICAL SPECIFICATIONS



NOVUM
Redefining refrigeration

WWW.NOVUM.IE

Novum LEAP™ Grand Cayman Vista 2.1m/2.5m



is one of our latest and most popular innovations. It was developed from the ground up to incorporate Novums LEAP™ technology combined with optimum visibility. The benefits of which are clear - No frost build up internally unique cassette refrigeration system & the lowest running costs of any cabinet of its size on the market.

The Grand Cayman Vista combines superior internal volume, with enhanced product visibility & product facing. Dual LED lighting, combined with a clean white interior provides spectacular illumination of the product. This combined with Novum’s LEAP™ Technology, makes a truly class leading cabinet. This state-of-the-art ultra- low energy cabinet is available in 2.1m and 2.5m lengths.



-  Removable Cassette
-  LED options available
-  Dual Temperature
-  100% Frost Free

The unique curved glass on the end case offers an unequalled access into the cabinet. In practice, this means that the front corner of the cabinet can easily be shopped. The Novum Grand Cayman range is guaranteed to enhance the image of your store, save you money and improve your customer shopping experience.


It is a versatile cabinet that can be used as a stand-alone unit, as part of a line-up, back-to-back or as part of a full island and is available with sliding lids.

TECHNICAL SPECIFICATION

Grand Cayman Vista	Model	In-Line 2.1m	In-Line 2.5m	End of Aisle 2.1m
Technical Data				
Gross content	litre	1068	1298	1068
Net Content according to EN 23953	litre	710	1013	710
Total Display Area (TDA)	M²	1.66	2.0	1.8
Classification according to EN 23953		3L1	3L1	3L1
Ambient Temperature Range	°C	+16 to +25	+16 to +25	+16 to +25
Inner Temperature Range	°C	-18 to -25	-18 to -25	-18 to -25
Sound Pressure at 1m Distance	dB(A)	43.3	43.3	43.3
Electrical Data				
Nominal Voltage / Frequency	V / Hz	220-240 / 50	220-240/50	220-240 / 50
Nominal Power Cabinet	w	310	310	310
Nominal Power LED Light*	w	15W	19W	15W
Nominal Current	A	2.3	2.3	2.3
Fuse Protection	A	10	10	10
Energy consumption at 25°C	kWh/24h	6.38	6.95	7.56
Length of Power Supply Cord	mm	2000	2000	2000
Refrigeration Data				
Refrigerant	Type	R290	R290	R290
Gas Charge	g	65	65	65
Maximum Operating Pressure	bar	30	30	30
Maximum Heat Output	Watts	780	780	780
Net Average Heat Output	Watts	266	290	315
Dimensions				
Length Outside/ Inside	mm	2118/ 1925	2518/2325	2108 / 1925
Depth Outside/ Inside	mm	975 / 830	975/830	975 / 830
Front Access Height Outside	mm	769	769	769
Stacking Height at the Front / Back	mm	530	530	530
Weight				
Net Weight (excl. packaging, incl. internal accessories)	Kg	140	160	140
Gross Weight (incl. packaging & internal accessories)	Kg	150	170	150

* 1 of 2 options LED available. ** Provisional Estimate.
** = Estimated

Dimensions Grand Cayman Vista 2.1m/2.5m

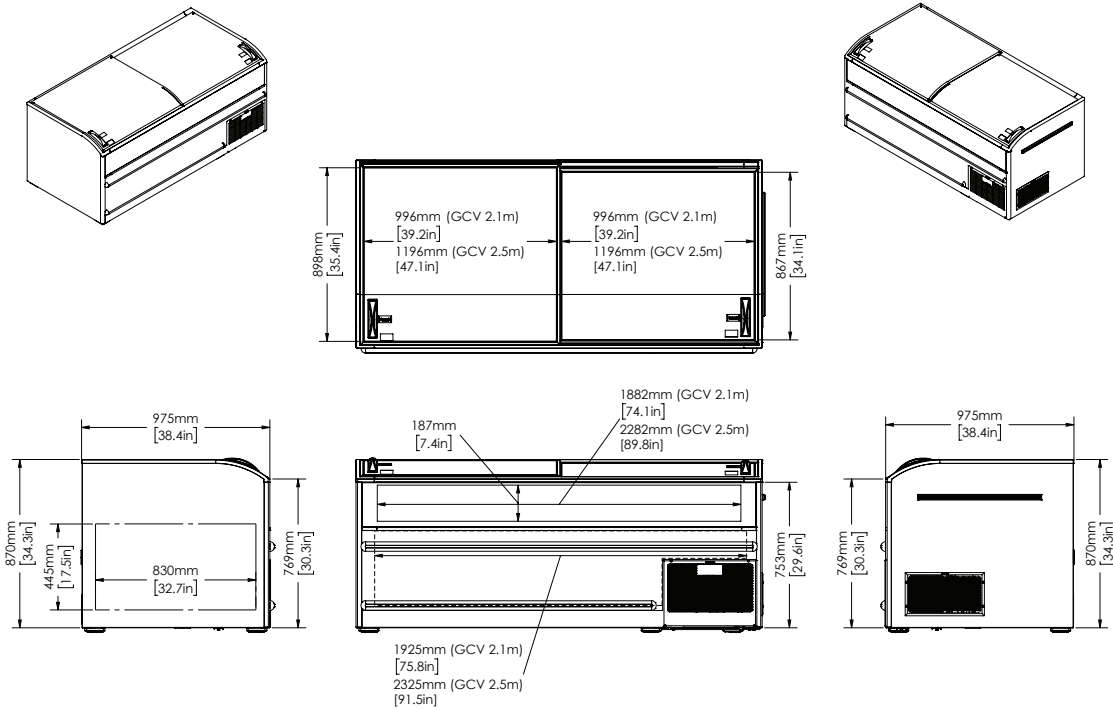

NOVUM LEAP™

GC Vista

For information on patents relating to LEAP™, please visit
<https://novum.ie/supermarket/expertise-support/patents/>

NOVUM

Redefining refrigeration

Novum (Overseas) Ltd.
The Novum Building
Clonshaugh Technology & Business Park
Dublin 17, Ireland

+353 1 803 6400
www.novum.ie

January 2026